


2294 / 2296 / 2298

RECESSED PANEL SANDWICH DOOR

www.chiohd.com C.H.I. OVERHEAD DOORS

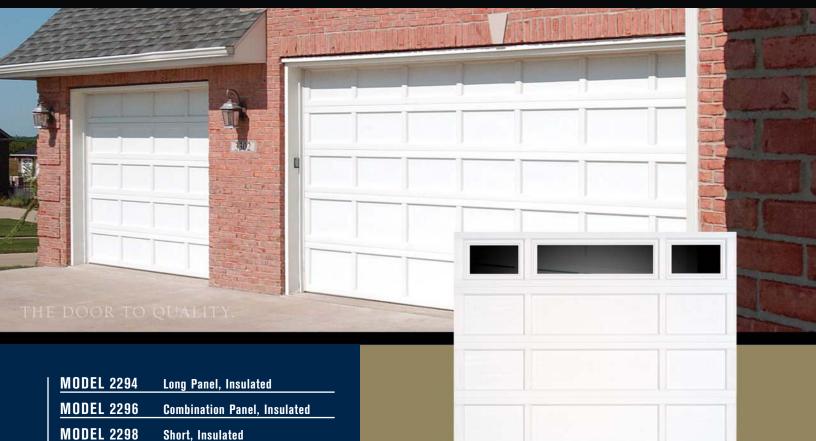

- 2" thick door sections are formed from 25-gauge exterior and 27-gauge interior galvanized draw quality steel
- Aluminum overlays are wood grain embossed
- Extra-heavy paint system consists of .25 mil. primer with rust inhibitor and a .75 mil. coating of baked-on polyester paint in your choice of white, almond or sandstone
- Optional glass is available in clear glass or glue chip pattern
- Custom designed springs for smooth operation and easy lifting
- · High-density polyurethane injected core
- Section joints are roll-formed into a tongue-and-groove design which produces a superior weather seal
- White, powder-coated hardware is available as an option
- Bottom weather seal utilizes an aluminum retainer and extruded virgin vinyl
- Long-lasting durable rollers assure consistent, efficient operation
- Recessed panel R-value 9.60*

*Calculated in accordance with ASHRAE standard formulas



9' x 7' 2294 white with optional window section


They may look like wood, but these models are actually all-metal, maintenance-free insulated doors. The front and back skins are made with a pre-finished, wood grain embossed steel and the cores are filled with high density polyurethane for optimum weather protection. An all-metal exterior is used on both the panels as well as the overlays to ensure years of worry free maintenance.

9' x 7' 2296 white with optional plain glass




WINDOW & GLASS OPTIONS

Add a touch of elegance to the outside of your home with the addition of decorative window & glass options from C.H.I. Our glass options are designed to enhance the natural beauty of your exterior while adding to the value of your home.

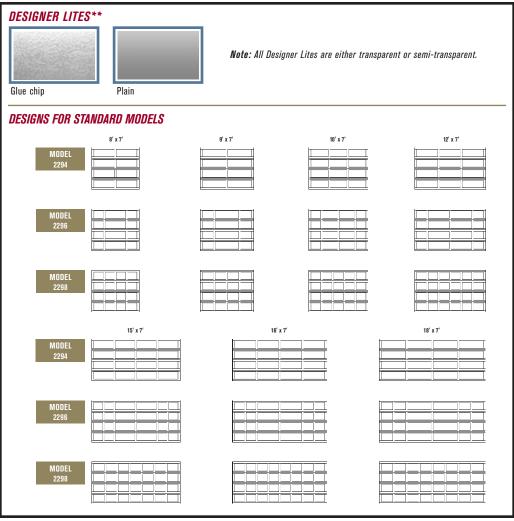

^{**}For all available window options, please see our Glass Options Brochure, or visit your C.H.I. Distributor.

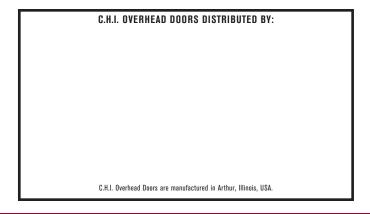





WHITE





ELECTION

S

10

SANDSTONE

Note: Refer to samples at your local C.H.l. distributor for exact color match.



DOOR CONSTRUCTION

Steel skins are roll-formed into a tongue and groove, then urethane insulation is injected, producing a superior weather seal.

2294/96/98.....R value - 9.60