

SERIES 5300/5600

PRE-FINISHED STEEL CARRIAGE HOUSE DOORS



the
door to
quality

Charming. Defined.



True carriage house style doesn't have to be complex. A durable, maintenance-free steel exterior, overlaid with poly accent battens creates the timeless look of the 5300 and 5600 Series from C.H.I. Overhead Doors. A durable steel base section provides the foundation for an addition to your home that will last for years to come. This door just helps to prove that sometimes the best things in life are simple.



residential | commercial | rolling steel doors

chiohd.com



Pictured. 3 9' x 8' 5331 almond doors with arched madison windows and spade hardware.

This series also available in **WINDBREAKER SERIES**



5300 Series. Utilizes a steel base sandwich section with a polystyrene core.

5600 Series. Utilizes a polyurethane injected steel thermally-broken base section.

FEATURES

Accent battens are laminated to the steel sections with high performance adhesives. The sections are then factory finished in white, almond or sandstone

Square top standard; optional arched top

Optional windows are available in clear glass, glue chip pattern or seeded glass, available in the top two sections of door

Faux windows are an option with the background color always being black and can be combined with all window section options

Series 5300 are 2" thick CFC free polystyrene insulated base sections

Series 5600 are 2" thick CFC free polyurethane insulated thermally-broken base sections

2-7/16" total section thickness

Wood-grained steel interior, pre-finished in white

White painted 20-gauge end stiles are standard

One set of spade decorative hardware is standard for all doors. Optional Barcelona or Wrought Iron designs replicate an old-world look

Concealed steel plates run continuously from top to bottom of each section for fastening hardware

Bottom weather seal utilizes an aluminum retainer and extruded virgin vinyl

Series 5300 DASMA TDS-163 calculated R-value* - 8.57


Series 5600 DASMA TDS-163 calculated R-value* - 15.38

*Calculated door section R-value is in accordance with DASMA TDS-163. This means that C.H.I. doors have met DASMA TDS-163 criteria for determining the effectiveness of insulation.


Note: Follow manufacturer's recommendations for surface preparation for field painting applications.

All information presented is based on the specifications and features available at the time of printing and is subject to change without notice.

DOOR DESIGNS

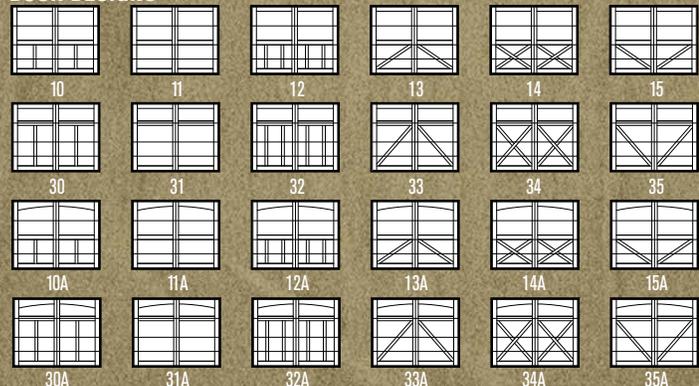

WINDOW OPTIONS

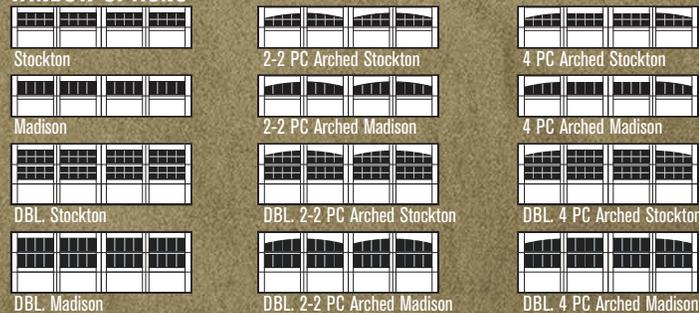

COLOR SELECTIONS

WHITE

ALMOND

SANDSTONE

Refer to samples at your local C.H.I. distributor for exact color match.

DESIGNER LITES



EXTERNAL HARDWARE

